


MOVENTO with BLUMOTION – 760H/766H

Webcode
 DQCZ3Y


Planning

Space requirement in cabinet




* +1 mm for assembly of the cabinet profile on the horizontal cabinet side

Drawer/inner drawer




SKW	Internal drawer width
LW	Internal cabinet width
**	Limited side adjustment for a drawer side panel thickness of 16 mm, but with full tolerance utilisation of the internal width of the drawer

Drawer



SKL	Drawer length
NL	Nominal length
*	Additional +12 mm with side stabilisation


Inner drawer




ISKL	Inner drawer length
SKL	Drawer length
NL	Nominal length
X	Front thickness
*	Additional +3 mm with depth adjustment

Screw position – cabinet profiles


Cabinet profile 760H – 40 kg
 Nominal length NL (mm)

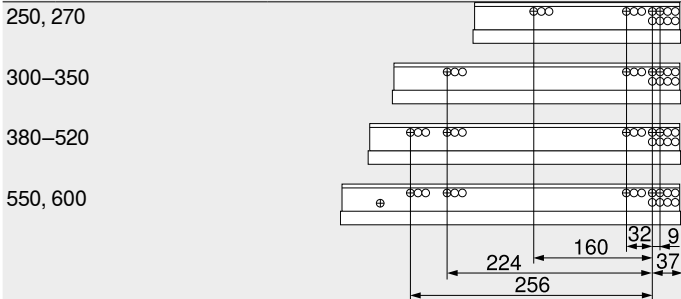

Cabinet profile 766H – 60 kg
 Nominal length NL (mm)

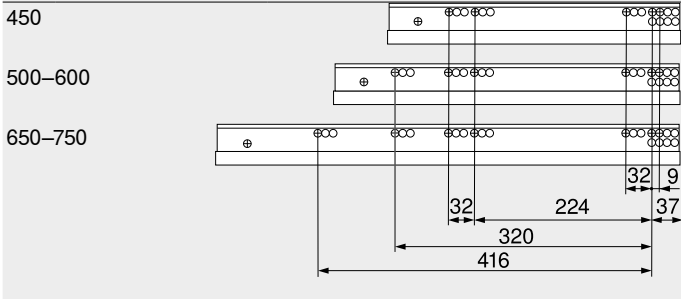

Drawer assembly

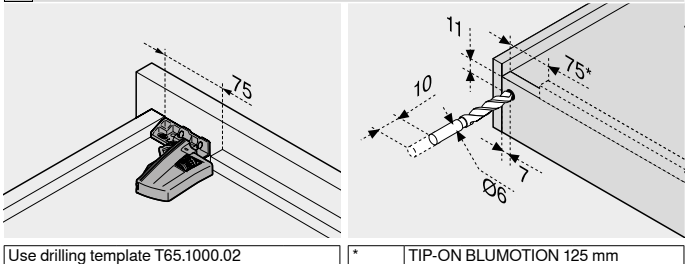

Use drilling template T65.1000.02

* TIP-ON BLUMOTION 125 mm

Page instructions

Overview – MOVENTO	427	More technical details	774
Overview – SERVO-DRIVE for MOVENTO/TANDEM	591		
Accessories	436		
Cabinet profile fixing positions	441		
Assembly, removal and adjustment	443		
Overview – assembly devices	683		