




Progressa+ Shelf

Technical information


For Progressa+ Shelf slides

Plan view - Full-extension

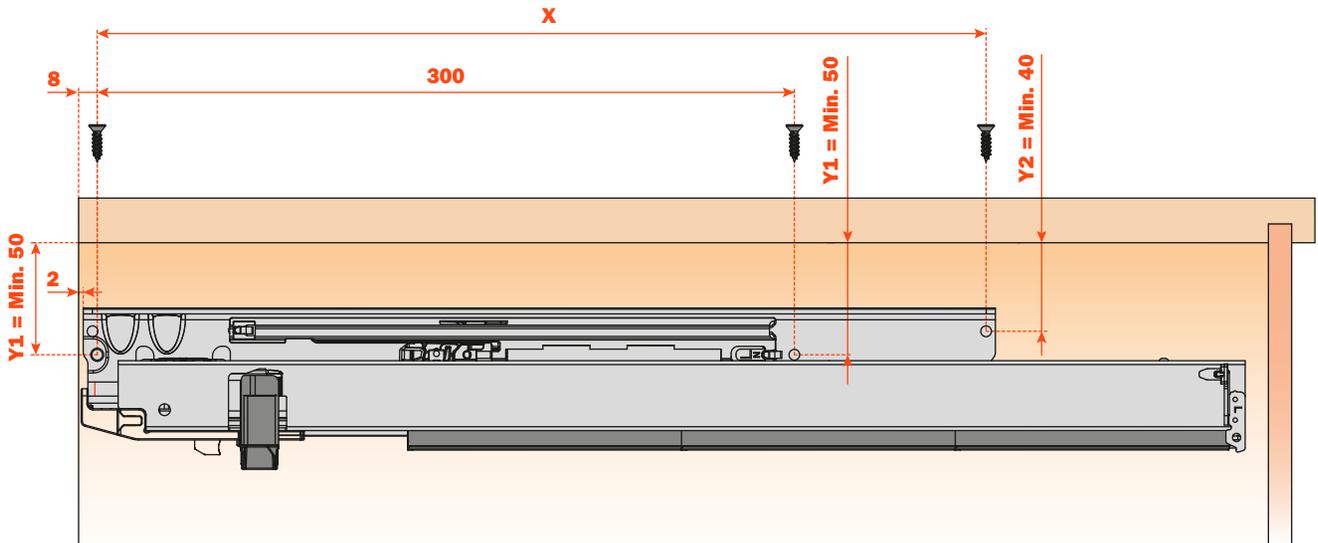


RUNNER LENGTH (LN)	X
350 mm	305 mm
400 mm	305 mm
450 mm	320 mm
500 mm	382.5 mm

Progressa+ Shelf slides when using AFCGX3B locking device

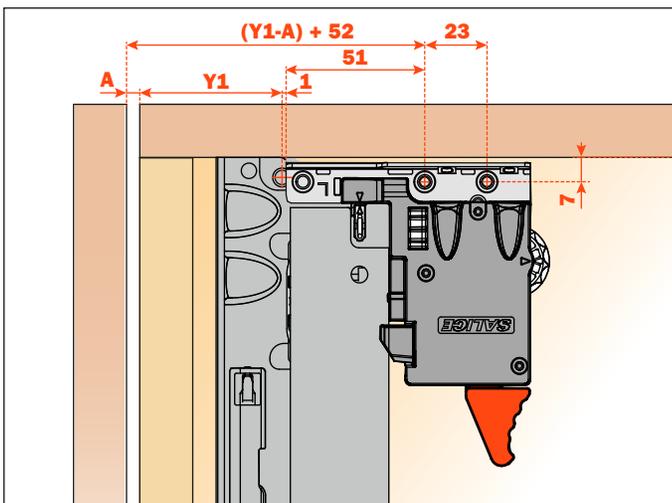

Height adjustments +2.5 mm
 Depth adjustments +/- 3 mm
 Side adjustments +/- 1.5 mm

Progressa+ Shelf slides when using AFCEX56B locking device

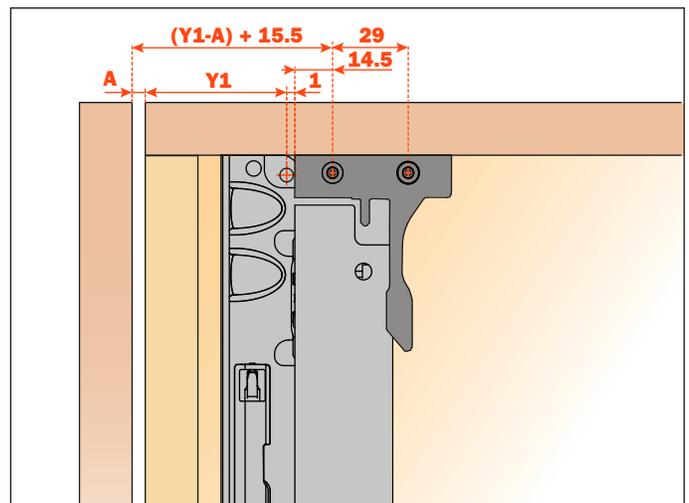


Height adjustments +2.5 mm

Technical information - Rear hook


For Progressa+ Shelf slides

Assembly on the pull-out shelf with a 12 mm minimum thickness

Rear hook bracket **AGAPXXYI**

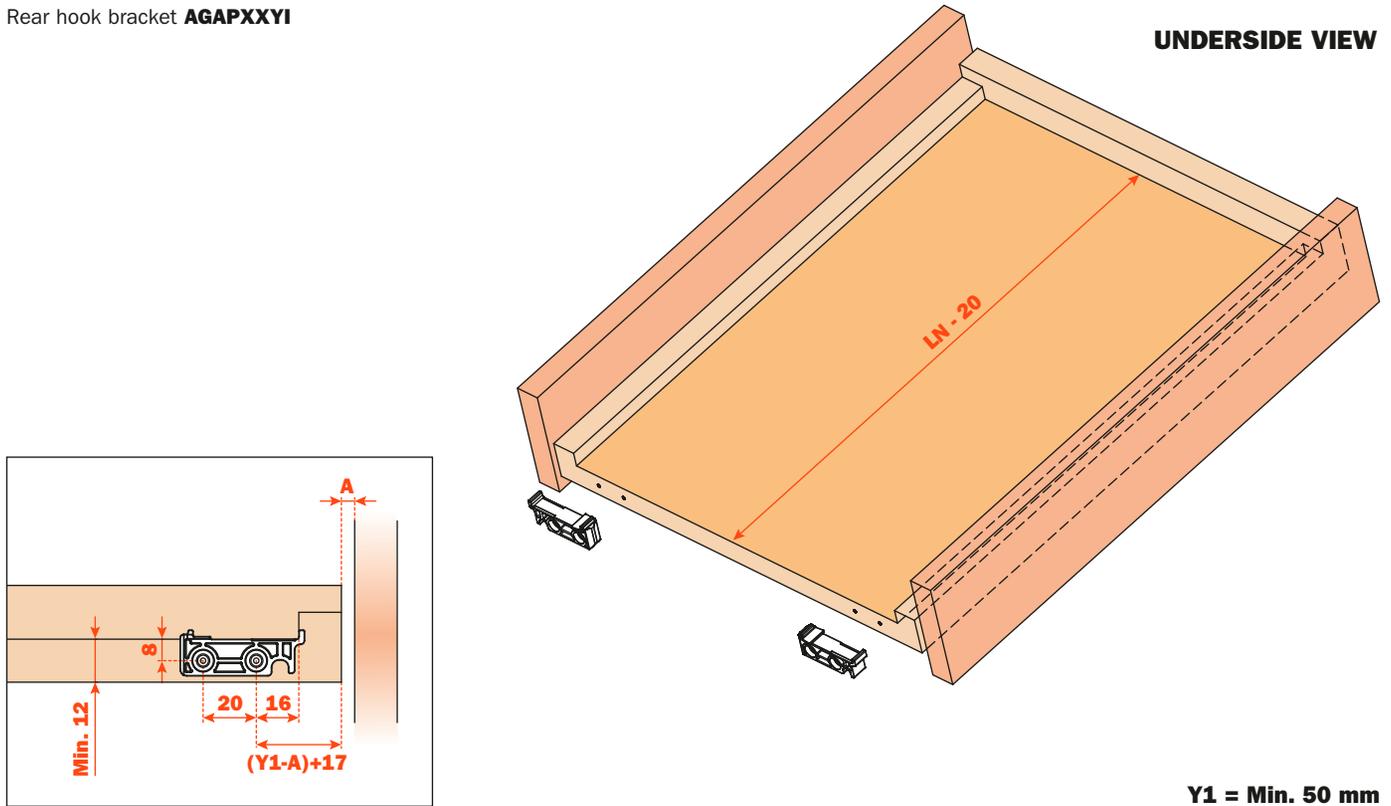

Assembly on the pull-out shelf with a 16 mm minimum thickness

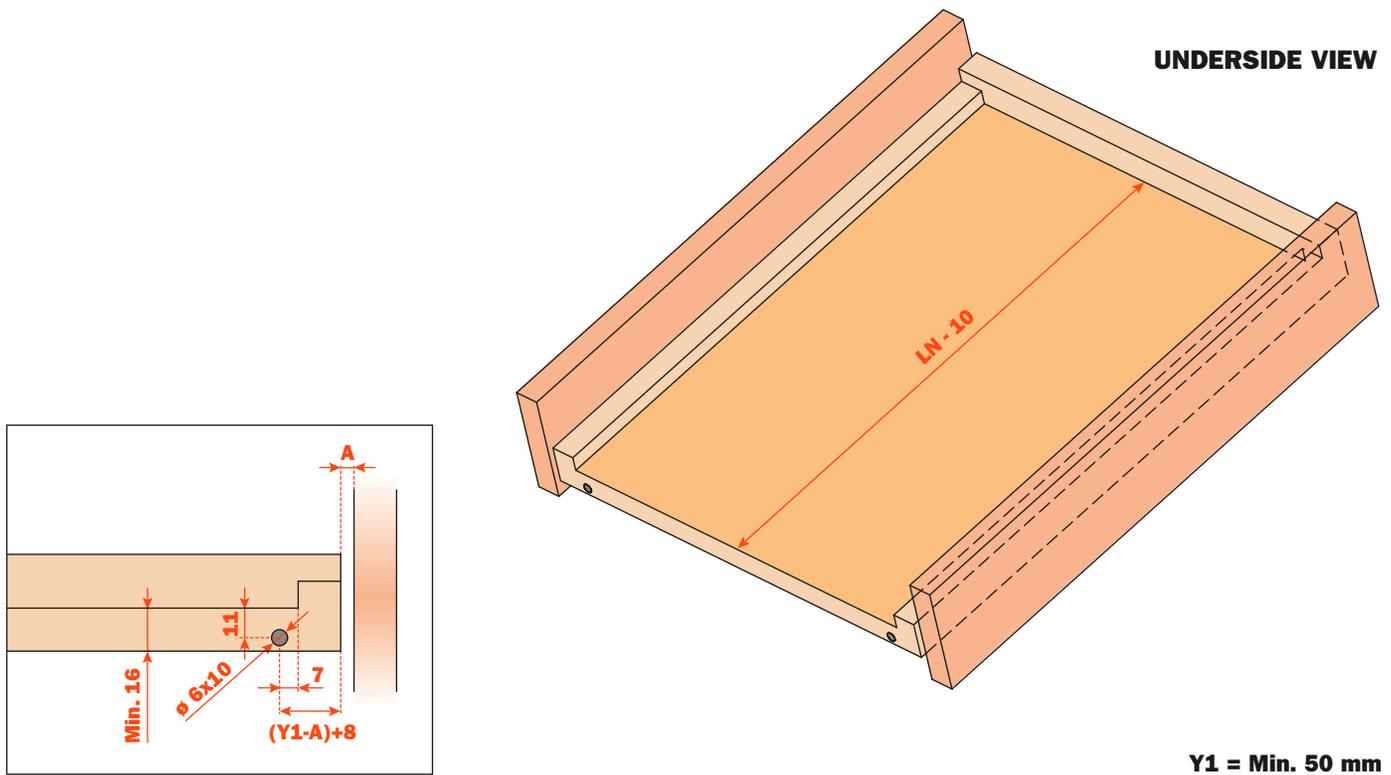

**Progressa+ - Concealed undermount Shelf runner - Full-extension
Shelf Smove**




Full-extension runner attached to the shelf by clips.



Smove: soft closing mechanism, fully integrated into the drawer runner.

Product features

- 70 kg Dynamic load capacity
- Full extension with a synchronized mechanism
- Available in lengths ranging from 350 mm to 500 mm in 50 mm increments
- Enhanced smooth soft closing action
- Safety system that prevents the shelves from turning over
- Tool free height adjustments +2.5 mm
- Tool free depth adjustments +/- 3 mm
- Tool free side adjustments +/- 1.5 mm
- Finish: bright zinc-plated
- 100% Made in Italy

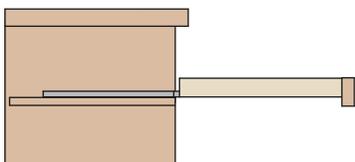


Dimensions

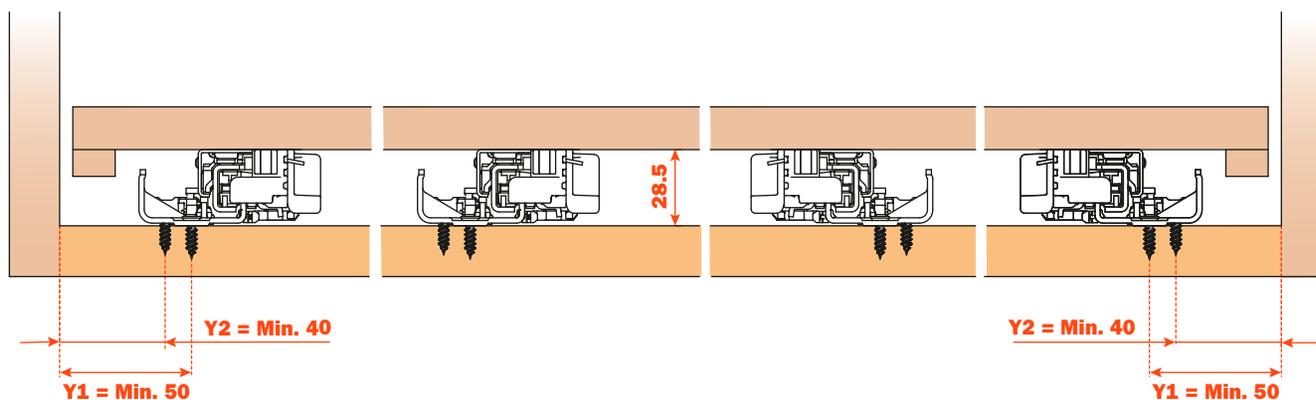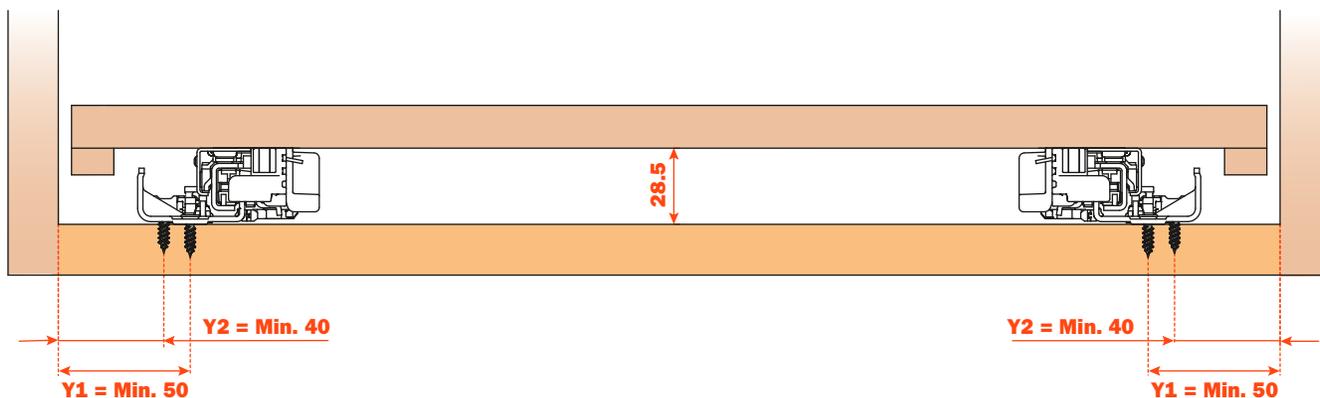

With larger and wider shelves, it is possible to increase the number of runners in order to improve the load capacity and the stability.

Part number

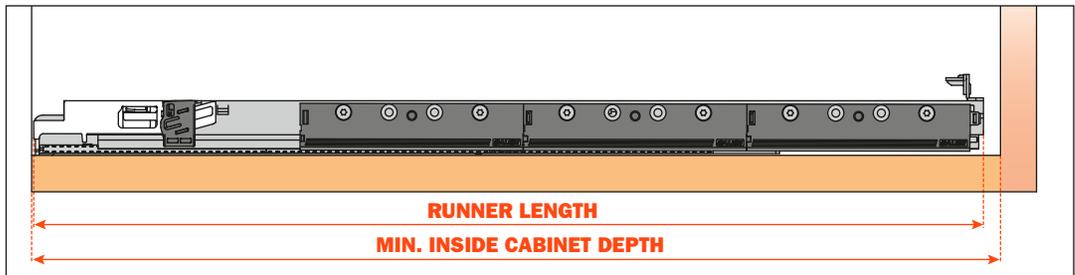

BASIC PART NUMBER	RUNNER LENGTH (LN) mm	MIN. DEPTH OF THE CABINET (PM) mm
G7E6R350XXF6	350	360
G7E6R400XXF6	400	410
G7E6R450XXF6	450	460
G7E6R500XXF6	500	510



AFCGXX3B Right and left

PACKAGING:
2 boxes = 100 pcs right and 100 pcs left



AFCEX56B Right and left

PACKAGING:
2 boxes = 100 pcs right and 100 pcs left

**Progressa+ - Concealed undermount Shelf runner - Full-extension
Shelf Push to open**




Full-extension runner attached to the shelf by clips.



Push: the opening system for handle-less drawers is fully integrated in the runner. A slight pressure of the drawer front is enough for the drawer to open.

Product features

- 70 kg Dynamic load capacity
- Full extension with a synchronized mechanism
- Available in lengths ranging from 350 mm to 500 mm in 50 mm increments
- Integrated Push opening system
- Safety system that prevents the shelves from turning over
- Tool free height adjustments +2.5 mm
- Tool free depth adjustments +/- 3 mm
- Tool free side adjustments +/- 1.5 mm
- The shelf is held in the closed position
- Finish: bright zinc-plated
- 100% Made in Italy

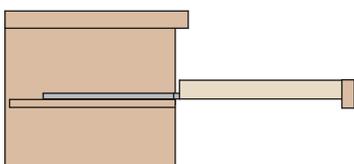


Dimensions

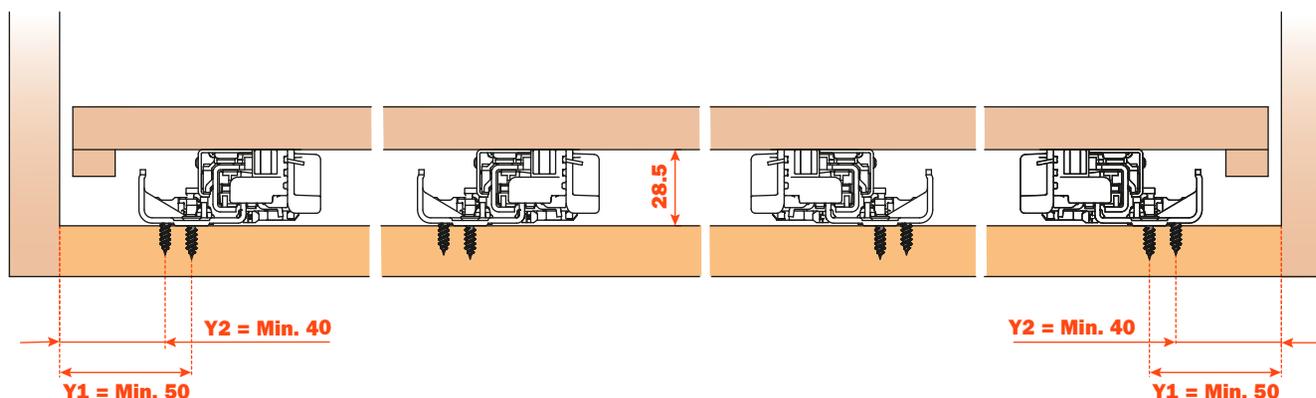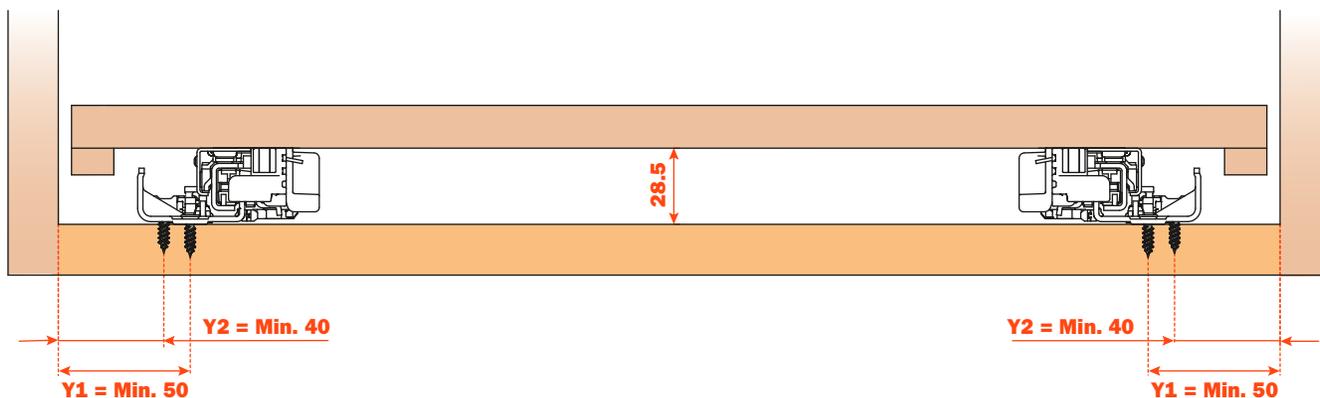

With larger and wider shelves, it is possible to increase the number of runners in order to improve the load capacity and the stability.



Part number

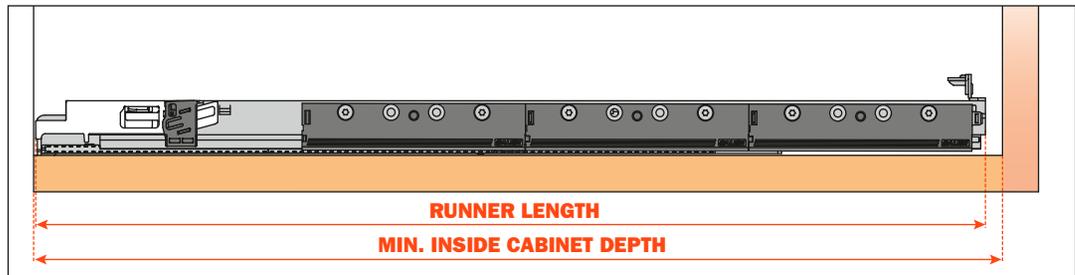

BASIC PART NUMBER	RUNNER LENGTH (LN) mm	MIN. DEPTH OF THE CABINET (PM) mm
G7E6Q350XXF6	350	360
G7E6Q400XXF6	400	410
G7E6Q450XXF6	450	460
G7E6Q500XXF6	500	510



AFCGXX3B Right and left

PACKAGING:
2 boxes = 100 pcs right and 100 pcs left